




Motor Flange

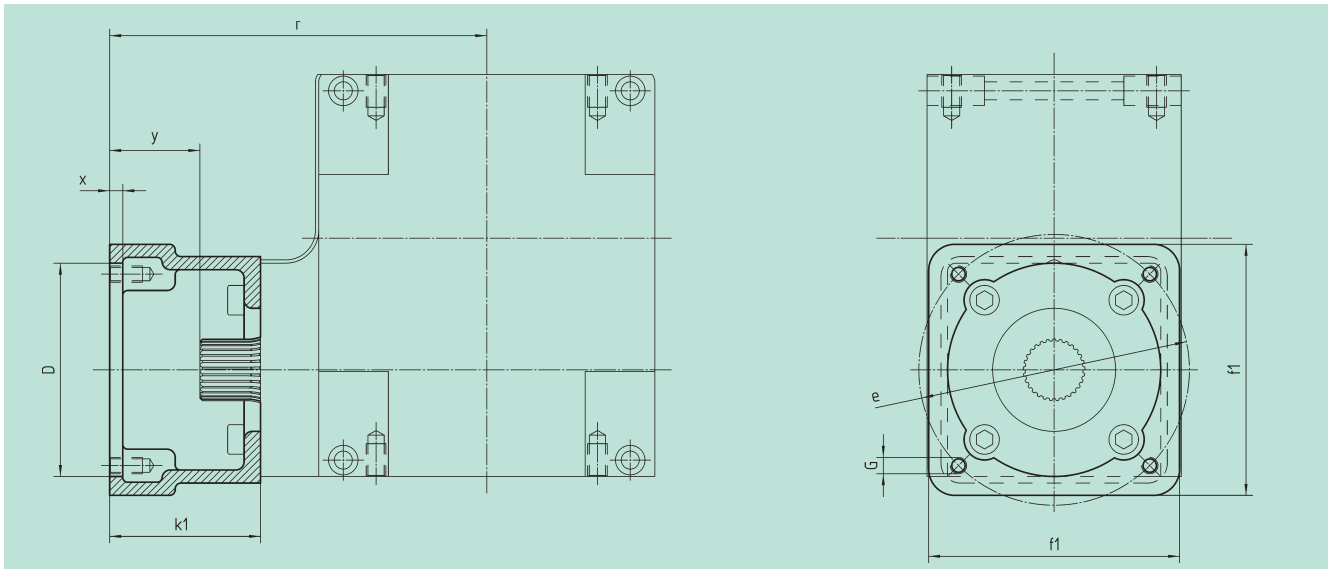

Center Distance $a_o = 100 \text{ mm}$

Order Code	D ^{G7}	k ₁	r	x	y	f ₁	e	G	kg
65 59 501	110.0	92.0	240.0	7	55.0	153	165	M10	2.0
65 59 502	130.0	92.0	240.0	7	55.0	153	165	M10	3.5
65 59 503	180.0	122.0	270.0	7	85.0	192	215	M12	3.5
65 59 504	180.0	127.0	275.0	7	90.0	192	215	M12	3.5
65 59 505	180.0	112.0	260.0	7	75.0	192	215	M12	3.0
65 59 506	130.0	112.0	260.0	7	75.0	192	215	M12	3.0
65 59 507	130.0	112.0	260.0	7	75.0	155	165	M10	4.5
65 59 508	110.0	90.0	238.0	7	53.0	130	145	M8	2.0
65 59 509	110.0	108.5	256.5	7	71.5	130	145	M8	2.5
65 59 510	114.3	129.5	277.5	7	92.5	180	200	M12	5.5
65 59 511	114.3	163.5	311.5	7	126.5	180	200	M12	8.0
65 59 512	114.3	105.5	253.5	7	68.5	180	200	M12	4.0
65 59 513	110.0	113.5	261.5	7	76.5	130	145	M8	2.5

The order should contain gear box 59 06 0xx / 59 16 0xx and flange 65 59 5xx.