




### Helical Tooth System, left-hand, 19° 31' 42", without Bore

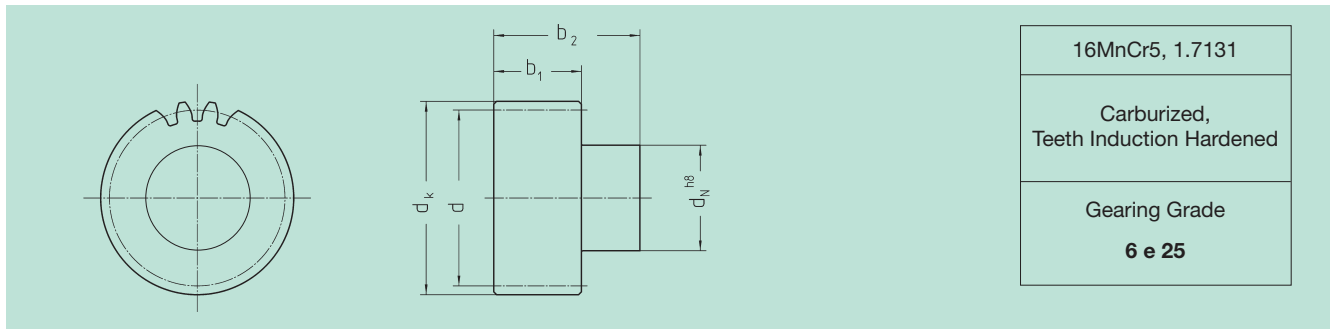

Order Code	Module	N° of Teeth	d	d*PI	d <sub>k</sub>	d <sub>N</sub>	b <sub>1</sub>	b <sub>2</sub>	kg	Shrink-Disk on Page GH-1
24 99 218	2	18	38.20	120.00	42.2	30	28	56	0.3	80 83 030
24 99 220	2	20	42.44	133.33	46.4	30	28	56	0.4	80 83 030
24 99 222	2	22	46.69	146.67	50.7	36	28	56	0.5	80 84 036
24 99 225	2	25	53.05	166.67	57.1	44	28	60	0.8	80 80 044
24 99 228	2	28	59.42	186.67	63.4	50	28	60	1.0	80 85 050
24 99 230	2	30	63.66	200.00	67.7	50	28	60	1.1	80 85 050
24 99 232	2	32	67.91	213.33	71.9	55	28	65	1.4	80 80 055
24 99 318	3	18	57.30	180.00	63.3	44	28	60	0.8	80 80 044
24 99 320	3	20	63.66	200.00	69.7	50	28	60	1.0	80 85 050
24 99 322	3	22	70.03	220.00	76.0	55	28	65	1.4	80 80 055
24 99 325	3	25	79.58	250.00	85.6	62	28	65	1.8	80 86 062
24 99 328	3	28	89.13	280.00	95.1	68	28	65	2.3	80 80 068
24 99 418	4	18	76.39	240.00	84.4	62	40	77	2.0	80 86 062
24 99 420	4	20	84.88	266.67	92.9	62	40	77	2.4	80 86 062
24 99 421	4	21	89.13	280.00	97.1	68	40	77	2.8	80 80 068
24 99 422	4	22	93.37	293.33	101.4	68	40	77	2.9	80 80 068
24 99 424	4	24	101.86	320.00	109.9	80	40	80	3.9	80 87 080
24 99 425	4	25	106.10	333.33	114.1	80	40	80	4.0	80 87 080
24 99 522	5	22	116.71	366.67	126.7	80	50	90	5.5	80 87 080
24 99 524	5	24	127.32	400.00	137.3	110	50	110	9.6	80 80 110
24 99 525	5	25	132.63	416.67	142.6	110	50	110	9.1	80 80 110
24 99 620	6	20	127.32	400.00	139.3	110	60	120	9.7	80 80 110
24 99 820 <sup>1)</sup>	8	20	169.77	533.33	185.8	125	80	145	19.4	80 80 125

<sup>1)</sup> With bore Ø40<sup>H7</sup>

The pinion could be fixed at d<sub>k</sub> or d<sub>n</sub> to be reworked (see page ZF-10).

Maximum bore diameter of the pinion on request.

